





Section View





Symbol Legend


 POWER FEED

 CANOPY KIT


 STRAIGHT JOIN

 SUSPENSION KIT

 FIXING POINT

 END CAP

VIEW ONLINE →

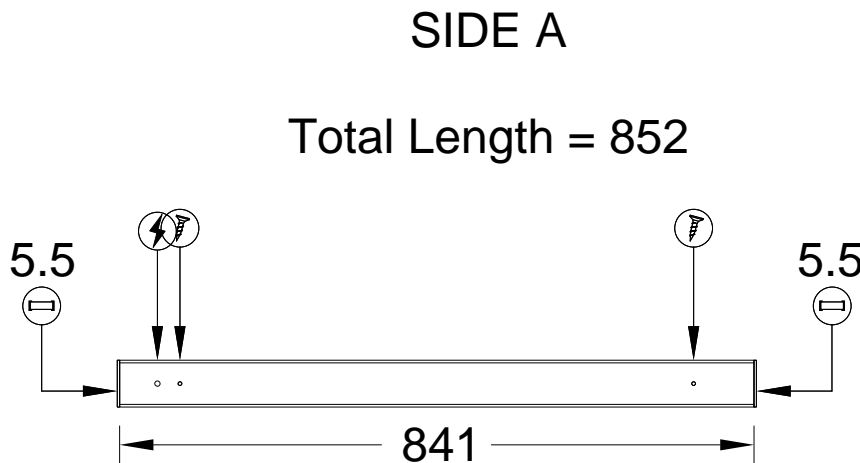

Product Specifications	
Shape	Line Shape
Mounting	Surface
Finish	Textured Black
Optics	Opal
Performance	High Output
Light Direction	Direct
Light Colour	4000K
Overall Length	852mm
Absolute Luminous Flux	2279lm
Lead Time	Assembled
Product Series	LX Infinity High Output Direct Surface Mounted Linear Light w/Opal Diffuser
Material	Powder Coated Aluminium, PC Diffuser
IP Rating	IP40
CRI	80+ (R9: >0)
UGR	<22
Total LED Power	19W
Efficacy	120.0lm/W
Colour Deviation	SDCM≤3
Lifetime	>60,000h L80B10
Warranty	5 Years

Components		
Product Code	Product Description	Qty
LSXX.MCAP.TB	LX Indirect Magnet Endcap for Standard Tray	2
LDSOHO08.TB40.F	LX Infinity High Output Direct Standard Opal	1

Notes

Name
Email
Company
Project Name
Project Address
Date
30 April 2024

For Approval
Name
Sign
Date
Please attach signed shop drawings with purchase order and return to Unios if you wish to proceed.